

PLANOFLEX



Range of suction / blowing tables with height adjustment and built-in 4kW boiler.

Accessories for any need or application.

Product codes: 2571, 2572, 2573, 2574




[WATCH VIDEO](#)




[PLANOFLEX CATALOGUE](#)

DESCRIZIONE: SModular range of suction / blowing tables with height adjustment and built-in 4kW boiler. This models' high modularity and flexibility allows to configure the table to the needs of the specific application. Available for use with point to the right or point to the left. May also be equipped with double pedals set for use on both sides. Available in four utility shapes.


Available shapes

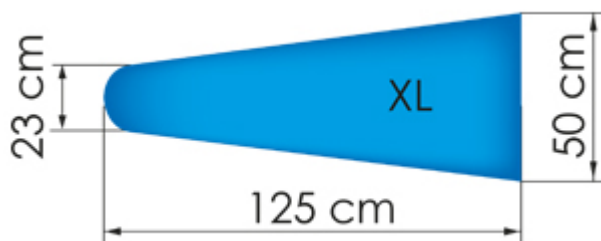


XL surface size

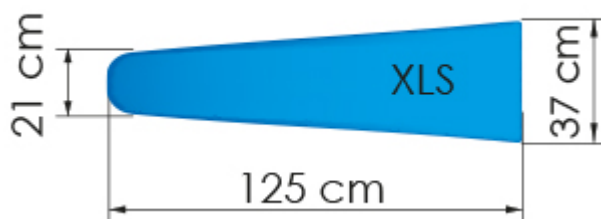

XLS surface size

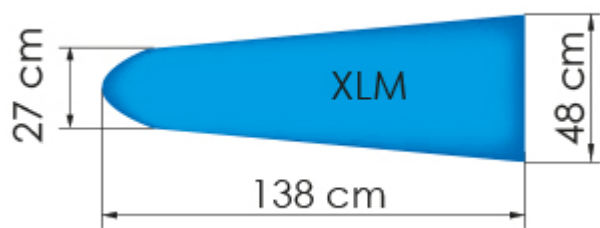

XLM surface size

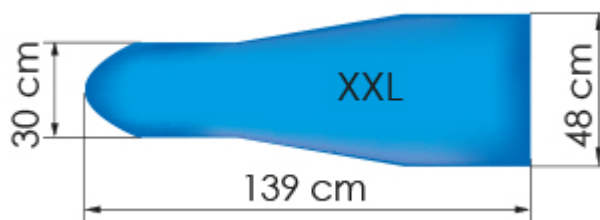

XXL surface size


|

MAIN FEATURES




Spring aided height adjustment


From 80 to 100 cm. No tools needed.

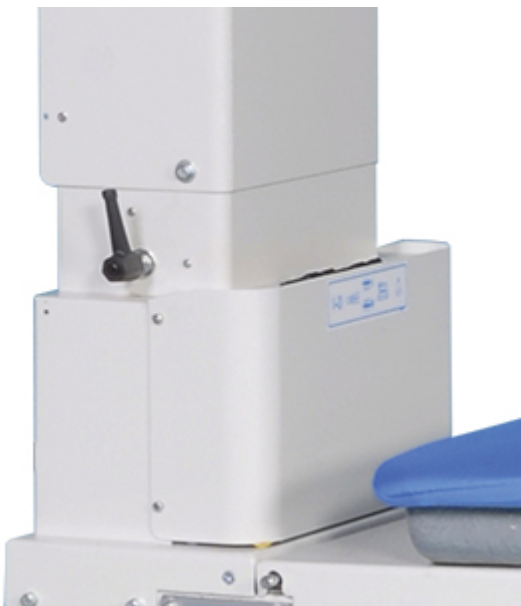


Adjustments of suction strength

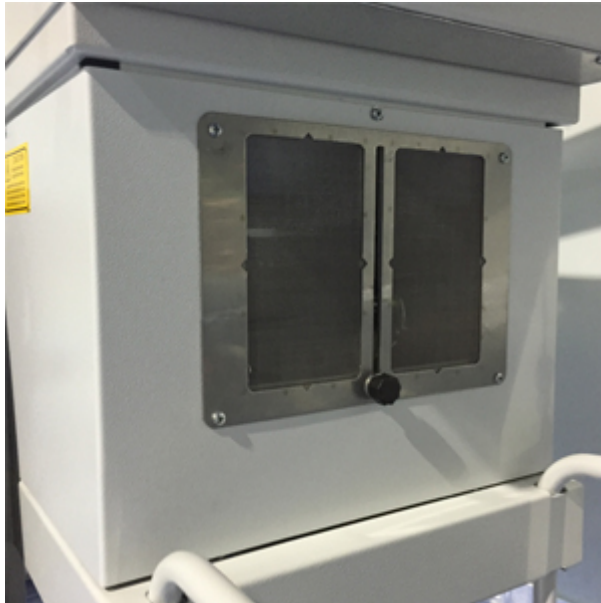

Adjustment of blowing strength

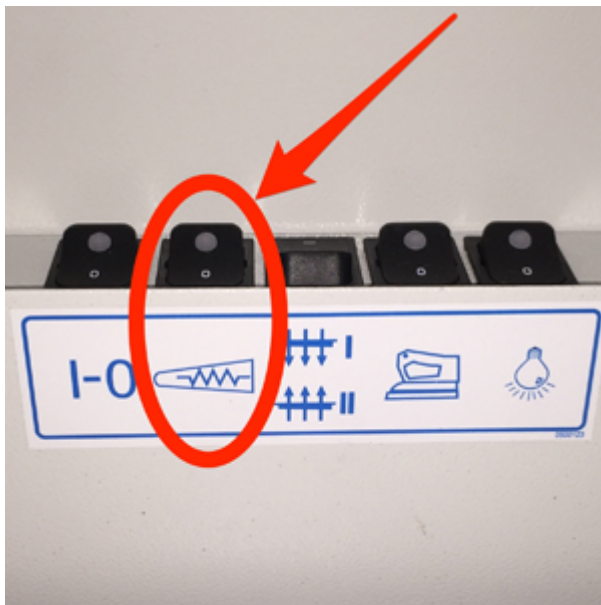

Surface heating with independent switch

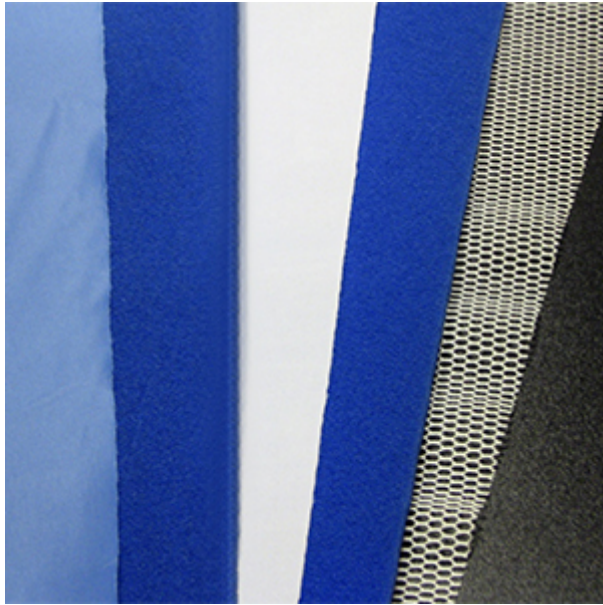

Superior foam padding that ensures long time efficiency and a dry surface

Double layer of highly transpirant foam, with middle layer of anti-drop fabric.




Garment tray



Hangers support



Cable stand

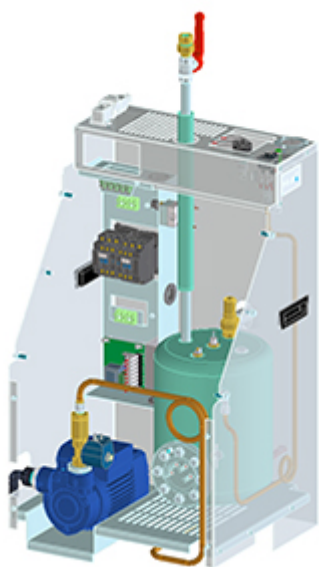

Stainless steel 4kW boiler that can feed up to 2 irons


Automatic boiler with electronic level control. Incoloy heating elements.



Professional steam electric iron included

[FIND OUT MORE](#)

OPTIONS

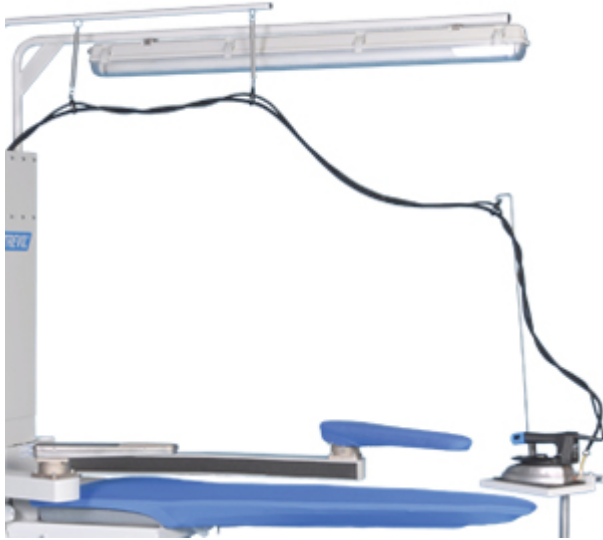

Lighting group with or without iron balancer



Vacuum and blowing sleeve bucks



Pivoting iron support for use with point to the right



Spotting arm and gun

**All steam iron**[FIND OUT MORE](#)**Steam gun**[FIND OUT MORE](#)




Steam / Air gun

[FIND OUT MORE](#)



Cold spotting gun

Requires compressed air.

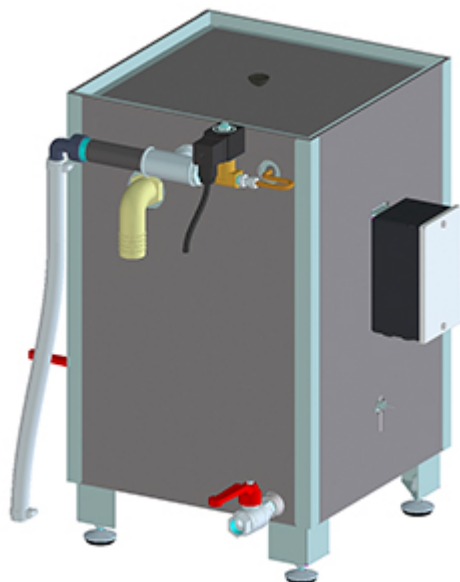[FIND OUT MORE](#)


Water tanks with floating ball with or without condensate recovery

TECHNICAL SPECIFICATIONS

	2571	2572	2573	2574
Description	XL utility shape with 4 kW boiler	XLS utility shape with 4 kW boiler	XLM utility shape with 4 kW boiler	XXL utility shape with 4 kW boiler
Electrical requirements	400V 3N 50Hz 220V 3 60Hz	400V 3N 50Hz 220V 3 60Hz	400V 3N 50Hz 220V 3 60Hz	400V 3N 50Hz 220V 3 60Hz
Total power	6.06 kW	6.06 kW	6.06 kW	6.06 kW
Blowing power	0,45 kW 0,6 HP	0,45 kW 0,6 HP	0,45 kW 0,6 HP	0,45 kW 0,6 HP
Suction power	0,45 kW 0,6 HP	0,45 kW 0,6 HP	0,45 kW 0,6 HP	0,45 kW 0,6 HP
Pump power	0,37 kW 0,5 HP	0,37 kW 0,5 HP	0,37 kW 0,5 HP	0,37 kW 0,5 HP

	2571	2572	2573	2574
Heating element	0,44 kW	0,44 kW	0,44 kW	0,44 kW
Steam pressure	3 bar	3 bar	3 bar	3 bar
	43,5 PSI	43,5 PSI	43,5 PSI	43,5 PSI
Footprint	1560 x 475 mm	1560 x 475 mm	1560 x 475 mm	1560 x 475 mm
	61" x 18"	61" x 18"	61" x 18"	61" x 18"
Dimensions	1790 x 585 x	1790 x 585 x	1790 x 585 x	1790 x 585 x
	1900-2050 mm	1900-2050 mm	1900-2050 mm	1900-2050 mm
	70" x 23" x 75"-80"	70" x 23" x 75"-80"	70" x 23" x 75"-80"	70" x 23" x 75"-80"
Net weight	163 kg	150 kg	150 kg	150 kg
	359 lbs	331 lbs	331 lbs	331 lbs