

TREVIFLEX



Modular range of suction / blowing tables with height adjustment, for connection to central steam plant.

This models' high modularity and flexibility allows to configure the table to the needs of the specific application.

Product codes: 2471, 2472, 2473, 2474




[WATCH VIDEO](#)




[TREVIFLEX CATALOGUE](#)

DESCRIZIONE: Modular range of suction / blowing tables with height adjustment, for connection to central steam plant. This models' high modularity and flexibility allows to configure the table to the needs of the specific application. Available for use with point to the right or point to the left. May also be equipped with double pedals set for use on both sides. Available in four utility shapes.


Available shapes

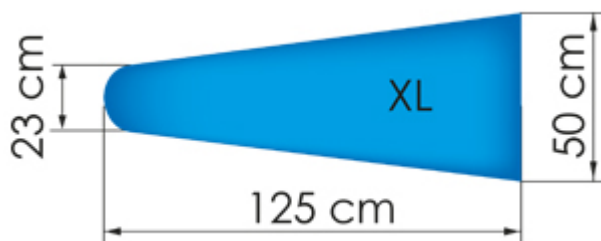


XL surface size

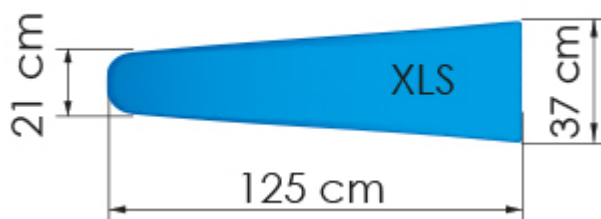

XLS surface size

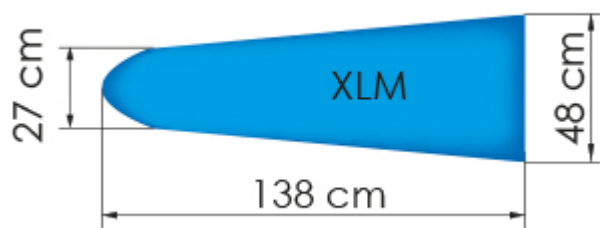

XLM surface size

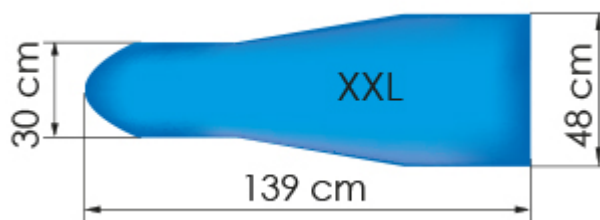

XXL surface size


|

MAIN FEATURES




Spring aided height adjustment


From 80 to 100 cm. No tools needed.

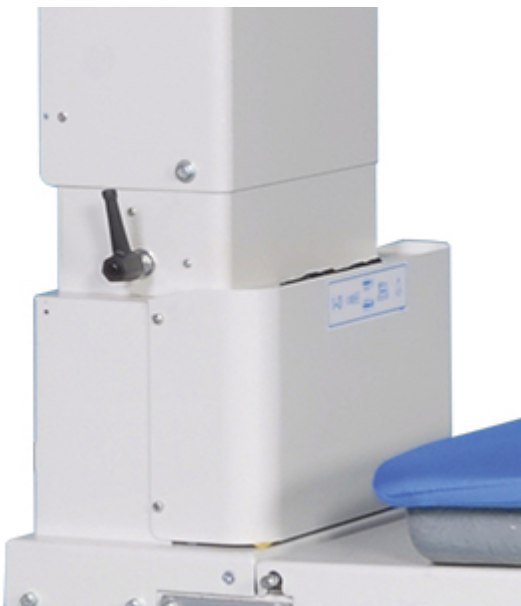


Adjustment of suction strength

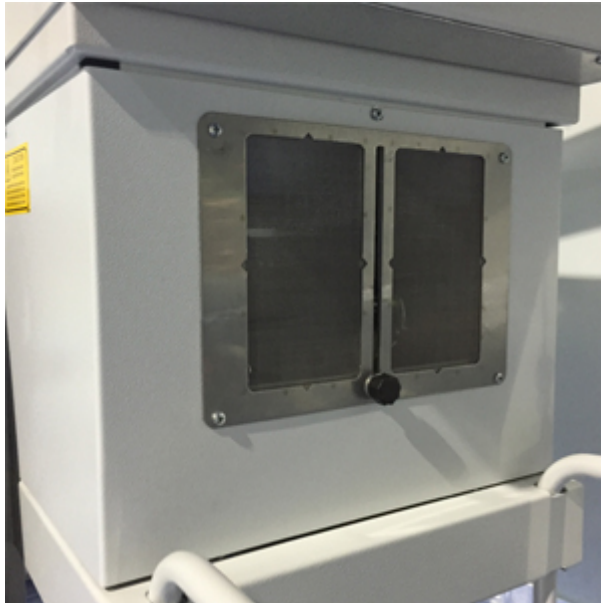

Adjustment of blowing strength

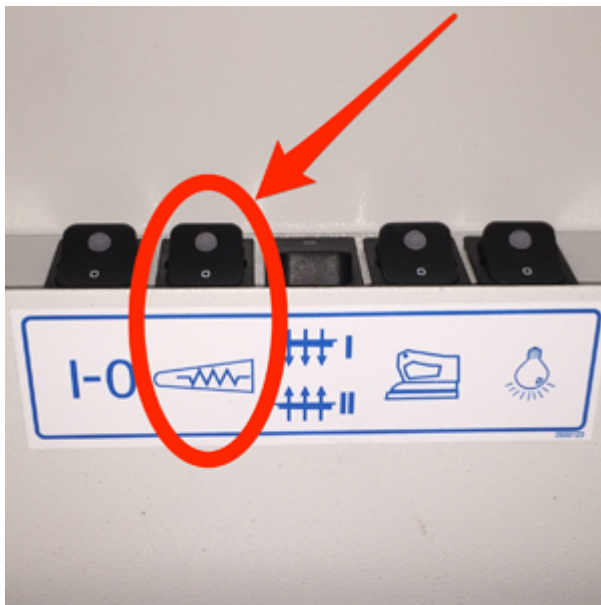

Surface heating with independent switch

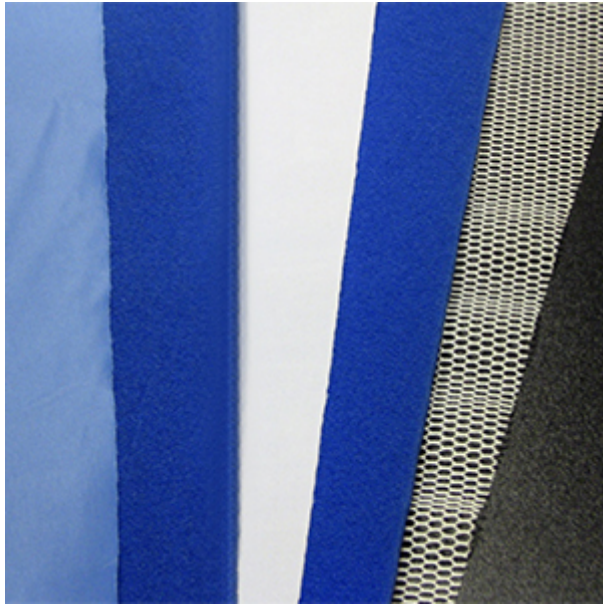


Superior foam padding that ensures long time efficiency and a dry surface

Double layer of highly transpirant foam, with middle layer of anti-drop fabric.



Garment tray

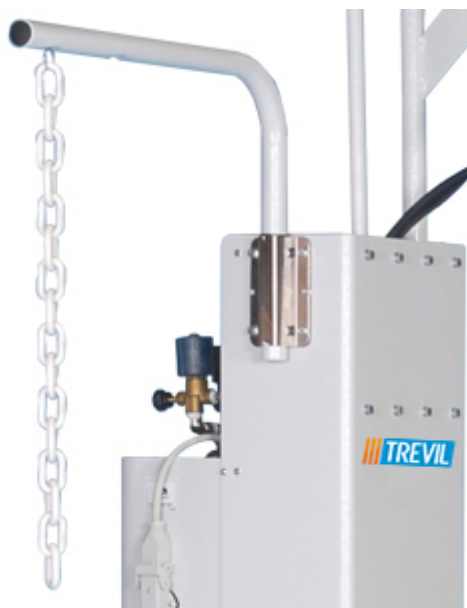

Hangers support included

OPTIONS



Lighting group with or without iron support



Vacuum and blowing sleeve bucks



Pivoting iron support for use with point to the right



Spotting arm and guns



Steam electric iron

[FIND OUT MORE](#)



All steam iron

[FIND OUT MORE](#)



Steam gun

[FIND OUT MORE](#)



Steam / Air gun

[FIND OUT MORE](#)



Cold spotting gun

Requires compressed air.

[FIND OUT MORE](#)

TECHNICAL SPECIFICATIONS

	2471	2472	2473	2474
Description	XL surface size	XLS surface size	XLM surface size	XXL surface size
Electrical requirements	400V 3N 50Hz	400V 3N 50Hz	400V 3N 50Hz	400V 3N 50Hz
	220V 3 60Hz	220V 3 60Hz	220V 3 60Hz	220V 3 60Hz
Total power	0,89 kW	0,89 kW	0,89 kW	0,89 kW
Blowing power	0,45 kW	0,45 kW	0,45 kW	0,45 kW
	0,6 HP	0,6 HP	0,6 HP	0,6 HP
Suction power	0,45 kW	0,45 kW	0,45 kW	0,45 kW
	0,6 HP	0,6 HP	0,6 HP	0,6 HP
Heating element	0,44 kW	0,44 kW	0,44 kW	0,44 kW
Steam consumption	2,72 kg/h	2,72 kg/h	2,72 kg/h	2,72 kg/h
	6 lbs/h (in the presence of iron)	6 lbs/h (in the presence of iron)	6 lbs/h (in the presence of iron)	6 lbs/h (in the presence of iron)
Footprint	1560 x 475 mm	1560 x 475 mm	1560 x 475 mm	1560 x 475 mm
	61" x 18"	61" x 18"	61" x 18"	61" x 18"
Dimensions	1790 x 585 x	1790 x 585 x	1790 x 585 x	1790 x 585 x
	1900-2050 mm	1900-2050 mm	1900-2050 mm	1900-2050 mm
	70" x 23" x 75"-80"	70" x 23" x 75"-80"	70" x 23" x 75"-80"	70" x 23" x 75"-80"
Net weight	136 kg	123 kg	123 kg	123 kg
	300 lbs	271 lbs	271 lbs	271 lbs